

WELD-ON®

2019 PRODUCT GUIDE



Weld-On led the industry by offering only low VOC products in 2009.

With the introduction of the ECO™ Series,
Weld-On sets a new industry standard
meeting tomorrow's regulations today.
MAXIMUM STRENGTH. ULTRA LOW VOC.



WELD-ON® SELECTION GUIDES

Choose the correct Weld-On products for your application based on the pipe diameter and material (PVC, CPVC, or ABS) being used. Refer to the following chart to find the product description on subsequent pages for further details.

| NOMINAL PIPE SIZE | | in | | | | | | | | | | | | | | | | | | |
|-------------------------------|-------------------------|--------------|------------|------------------|------------------|-------|----|-------|----|-----|-----|-----|-----|-----|-----|-----|-----|--|--|--|
| | | 1/2 | 3/4 | 1 | 1 1/4 | 1 1/2 | 2 | 2 1/2 | 3 | 4 | 6 | 8 | 10 | 12 | 14 | 24 | 30 | | | |
| | | mm | | | | | | | | | | | | | | | | | | |
| | | 20 | 25 | 32 | 40 | 50 | 63 | 75 | 90 | 110 | 160 | 200 | 250 | 315 | 355 | 600 | 800 | | | |
| WELD-ON PVC PRODUCTS | PVC CEMENTS | REGULAR BODY | COLOR | PRODUCT | | | | | | | | | | | | | | | | |
| | | | CLEAR | 700ECO™ | ECO™ | | | | | | | | | | | | | | | |
| | | | CLEAR | 700 | | | | | | | | | | | | | | | | |
| | | | CLEAR | 702 | | | | | | | | | | | | | | | | |
| | | CLEAR | 710 | | | | | | | | | | | | | | | | | |
| | | MEDIUM BODY | CLEAR | 704† | | | | | | | | | | | | | | | | |
| | | | CLEAR | 705ECO™ | ECO™ | | | | | | | | | | | | | | | |
| | | | CLEAR | 705† | INDUSTRIAL GRADE | | | | | | | | | | | | | | | |
| | | | BLUE | 721ECO™ | ECO™ | | | | | | | | | | | | | | | |
| | | | BLUE | 721† | | | | | | | | | | | | | | | | |
| | HEAVY BODY | | GRAY | 711ECO™ | ECO™ | | | | | | | | | | | | | | | |
| | | GRAY | 711 | INDUSTRIAL GRADE | | | | | | | | | | | | | | | | |
| | | CLEAR | 717ECO™ | ECO™ | | | | | | | | | | | | | | | | |
| | | GRAY | 717 | | | | | | | | | | | | | | | | | |
| | | GRAY | 719 | INDUSTRIAL GRADE | | | | | | | | | | | | | | | | |
| | EXTRA HEAVY BODY | AQUA | 725† | | | | | | | | | | | | | | | | | |
| | | BLUE | WET'R DRY™ | | | | | | | | | | | | | | | | | |
| | | CLEAR | 727† | | | | | | | | | | | | | | | | | |
| | | BLUE to | 737† | | | | | | | | | | | | | | | | | |
| | | CLEAR | TURF'N AG™ | | | | | | | | | | | | | | | | | |
| BLUE | | 750ECO™ | ECO™ | | | | | | | | | | | | | | | | | |
| BLUE | | 750† | | | | | | | | | | | | | | | | | | |
| SPECIALTY CEMENTS | CLEAR | 795 | | | | | | | | | | | | | | | | | | |
| | BLUE | 795 | | | | | | | | | | | | | | | | | | |
| | BLUE | 795 | | | | | | | | | | | | | | | | | | |
| | BLUE | 795 | | | | | | | | | | | | | | | | | | |
| | BLUE | 795 | | | | | | | | | | | | | | | | | | |
| POOL & SPA CEMENTS | REGULAR BODY | CLEAR | 740ECO™ | ECO™ | | | | | | | | | | | | | | | | |
| | | CLEAR | 740 | | | | | | | | | | | | | | | | | |
| | MEDIUM BODY | CLEAR | 744ECO™ | ECO™ | | | | | | | | | | | | | | | | |
| | | GRAY | 744 | | | | | | | | | | | | | | | | | |
| | HEAVY BODY | CLEAR | 746ECO™ | ECO™ | | | | | | | | | | | | | | | | |
| | | GRAY | 746 | | | | | | | | | | | | | | | | | |
| | SPECIALTY PRODUCTS | BLUE to | 747 | | | | | | | | | | | | | | | | | |
| | | CLEAR | 748ECO™ | ECO™ | | | | | | | | | | | | | | | | |
| | | BLUE to | 748 | | | | | | | | | | | | | | | | | |
| | | CLEAR | 748 | | | | | | | | | | | | | | | | | |
| | PLUMBING CEMENTS | REGULAR BODY | CLEAR | 780 | PLUMBING REGULAR | | | | | | | | | | | | | | | |
| | | MEDIUM BODY | CLEAR | 781† | PLUMBING MEDIUM | | | | | | | | | | | | | | | |
| HEAVY BODY | | CLEAR | 782 | PLUMBING HEAVY | | | | | | | | | | | | | | | | |
| NOMINAL PIPE SIZE | | in | | | | | | | | | | | | | | | | | | |
| | | mm | | | | | | | | | | | | | | | | | | |
| | | 20 | 25 | 32 | 40 | 50 | 63 | 75 | 90 | 110 | 160 | 200 | 250 | 315 | 355 | 600 | 800 | | | |



ECO SERIES



ALL WELD-ON PRODUCTS

REGULAR BODIED CEMENT



for pipe size up to 4"

MEDIUM BODIED CEMENT




for pipe size up to 6"

HEAVY BODIED CEMENT



for pipe size up to 12"

EXTRA HEAVY BODIED CEMENT

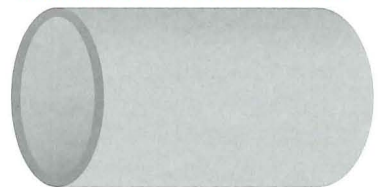

for pipe size up to 30"

WELD-ON ADDITIONAL PRODUCTS

| NOMINAL PIPE SIZE | | | in | 1/2 | 3/4 | 1 | 1 1/4 | 1 1/2 | 2 | 2 1/2 | 3 | 4 | 6 | 8 | 10 | 12 | 14 | 24 | 30 |
|-------------------------------|--------------------------|-----------------|-----------------------------|--|-----|----|-------|-------|----|-------|----|-----|-----|-----|-----|-----|-----|-----|-----|
| | | | mm | 20 | 25 | 32 | 40 | 50 | 63 | 75 | 90 | 110 | 160 | 200 | 250 | 315 | 355 | 600 | 800 |
| CPVC CEMENTS | REGULAR BODY | ORANGE | 713 | CTS ONLY | | | | | | | | | | | | | | | |
| | MEDIUM BODY | YELLOW | FLOWGUARD [®] GOLD | CTS ONLY | | | | | | | | | | | | | | | |
| | HEAVY BODY | ORANGE | 714 | [Industrial Grade] | | | | | | | | | | | | | | | |
| | HEAVY BODY | GRAY | | [Industrial Grade] | | | | | | | | | | | | | | | |
| | HEAVY BODY | ORANGE | 724 [†] | INDUSTRIAL GRADE | | | | | | | | | | | | | | | |
| | HEAVY BODY | GRAY | | [Industrial Grade] | | | | | | | | | | | | | | | |
| ABS | MEDIUM BODY | MILKY YELLOW | 771 | ALL CLASSES & SCHEDULES | | | | | | | | | | | | | | | |
| | MEDIUM BODY | BLACK | 773 | ALL CLASSES & SCHEDULES | | | | | | | | | | | | | | | |
| SPECIALTY | MEDIUM BODY | LIGHT AMBER | 790 [*] | [Specialty] | | | | | | | | | | | | | | | |
| | MEDIUM BODY | GREEN | 794 ^{**} | ALL CLASSES & SCHEDULES EXCEPT SCHEDULE 80 | | | | | | | | | | | | | | | |
| PRIMERS & CLEANERS | PURPLE | ECO PRIMER | | ECO | | | | | | | | | | | | | | | |
| | CLEAR | | | [Primer] | | | | | | | | | | | | | | | |
| | PURPLE | P68 | | [Primer] | | | | | | | | | | | | | | | |
| | CLEAR | | | [Primer] | | | | | | | | | | | | | | | |
| | PURPLE | P70 | | INDUSTRIAL GRADE | | | | | | | | | | | | | | | |
| | CLEAR | | | [Primer] | | | | | | | | | | | | | | | |
| | AQUA BLUE | P75 | | [Primer] | | | | | | | | | | | | | | | |
| | PURPLE | ECO POOL PRIMER | | ECO | | | | | | | | | | | | | | | |
| | CLEAR | | | [Primer] | | | | | | | | | | | | | | | |
| | PURPLE | PLUMBING PRIMER | | [Primer] | | | | | | | | | | | | | | | |
| CLEAR | | | [Primer] | | | | | | | | | | | | | | | | |
| PURPLE | PC-64 Primer-Conditioner | | [Primer] | | | | | | | | | | | | | | | | |
| CLEAR | | | [Primer] | | | | | | | | | | | | | | | | |
| CLEAR | C-65 Cleaner | | [Cleaner] | | | | | | | | | | | | | | | | |

PIPE FORMAT

- Schedule 40/PN3.2, PN4, PN6
 - Schedule 80/PN10, PN16
 - † Can be used without a primer on non-pressure systems with fittings having an interference fit (unless primer required by local code).
 - ◇ For CPVC and PVC Chemical Piping Systems
 - ª FlowGuard Gold[®] is a registered trademark of the Lubrizol Corp.
 - * PVC and CPVC
 - ** ABS to PVC Transition Joints
- CTS** Copper Tube Size



PVC SOLVENT CEMENTS

Regular Bodied



700ECO™ PVC

- Maximum strength. Ultra low VOC. Reduced odorous fumes for improved workplace environment.
- Excellent for irrigation, electrical conduit, pool & spa and plumbing, including PVC foam core pipe.



- 4" (110 mm) PVC Not for Schedule 80

Fast



PW-G/DWV/SW
U.P. CODE

ASTM D 2564
NSF/ANSI 14
NSF/ANSI 61

AVAILABLE SIZES

Gallon (#14800), Quart (#14801), Pint (#14802), ½ Pint (#14803), ¼ Pint (#14804)



700™ PVC

- Excellent for irrigation, electrical conduit, pool & spa and plumbing, including PVC foam core pipe.

- 4" (110 mm) PVC Not for Schedule 80

Fast



PW-G/DWV/SW

ASTM D 2564
NSF/ANSI 14
NSF/ANSI 61

AVAILABLE SIZES

Gallon (#10078), Quart (#10079), Pint (#10080), ½ Pint (#10081), ¼ Pint (#10082)



702™ PVC

- Excellent for DWV, irrigation, electrical conduit, pool & spa and plumbing, including PVC foam core pipe.

- 4" (110 mm) PVC Not for Schedule 80

Fast



PW-G/DWV/SW

ASTM D 2564
NSF/ANSI 14
NSF/ANSI 61

AVAILABLE SIZES

Gallon (#10974), Quart (#10975), Pint (#10976), ½ Pint (#10977), ¼ Pint (#10978)



710™ PVC

- Specially formulated for irrigation piping. Suitable for electrical conduit, pool & spa and plumbing, including PVC foam core pipe.

- 2" (63 mm) PVC Not for Schedule 80

Very Fast



PW-G/DWV/SW

ASTM D 2564
NSF/ANSI 14
NSF/ANSI 61

AVAILABLE SIZES

Gallon (#10111), Quart (#10112), Pint (#10113), ½ Pint (#10114), ¼ Pint (#10115)

Medium Bodied



704™ PVC

- Quality formulation for irrigation, electrical conduit, pool & spa and plumbing, including PVC foam core pipe.
- Can be used without primer on non-pressure systems if local codes permit.

- 6" (160 mm) PVC
- 4" (110 mm) Schedule 80 PVC

Fast



PW-G/DWV/SW



C US
PW-G/DWV/SW
(Gray Only)

ASTM D 2564
NSF/ANSI 14
NSF/ANSI 61
CSA B137.3
CSA B181.2

AVAILABLE SIZES

CLEAR: Gallon (#12122), Quart (#12123), Pint (#12124), ½ Pint (#12125), ¼ Pint (#12126)
GRAY: Gallon (#12127), Quart (#12128), Pint (#12129), ½ Pint (#12130), ¼ Pint (#12131)



705ECO™ PVC

- Maximum strength. Ultra low VOC. Reduced odorous fumes for improved workplace environment.
- For industrial, irrigation, DWV, electrical conduit, pool & spa and plumbing, including PVC foam core pipe.
- Can be used without primer on non-pressure systems if local codes permit.



- 6" (160 mm) PVC
- 4" (110 mm) Schedule 80 PVC

Fast



PW-G/DWV/SW
U.P. CODE



C US
PW-G/DWV/SW
(Gray Only)

ASTM D 2564
NSF/ANSI 14
NSF/ANSI 61
CSA B137.3
CSA B181.2

AVAILABLE SIZES

CLEAR: Gallon (#14805), Quart (#14806), Pint (#14807), ½ Pint (#14808), ¼ Pint (#14809)
GRAY: Gallon (#14810), Quart (#14811), Pint (#14812), ½ Pint (#14813), ¼ Pint (#14814)



705™ PVC

INDUSTRIAL GRADE

- High-strength formula for industrial, irrigation, DWV, electrical conduit, pool & spa and plumbing, including PVC foam core pipe.
- Can be used without primer on non-pressure systems if local codes permit.

- 6" (160 mm) PVC
- 4" (110 mm) Schedule 80 PVC

Fast



PW-G/DWV/SW



C US
PW-G/DWV/SW
(Gray Only)

ASTM D 2564
NSF/ANSI 14
NSF/ANSI 61
CSA B137.3
CSA B181.2

AVAILABLE SIZES

CLEAR: Gallon (#10085), Quart (#10089), Pint (#10093), ½ Pint (#10097), ¼ Pint (#10100)
GRAY: Gallon (#10086), Quart (#10090), Pint (#10094), ½ Pint (#10098), ¼ Pint (#10101)



721ECO™ PVC

- Maximum strength. Ultra low VOC. Reduced odorous fumes for improved workplace environment.
- Premium, high-strength formulation for irrigation, DWV, pool & spa and plumbing.
- Can be used without primer on non-pressure systems if local codes permit.



- 6" (160 mm) PVC
- 4" (110 mm) Schedule 80 PVC

Fast



PW-G/DWV/SW
U.P. CODE

ASTM D 2564
NSF/ANSI 14
NSF/ANSI 61

AVAILABLE SIZES

Gallon (#14927), Quart (#14928), Pint (#14929), ½ Pint (#14930), ¼ Pint (#14931)

PVC SOLVENT CEMENTS

| | Max Pipe Size (Interference Fit) | Set Time | Available Color | Industry Listing | Meets Following Performance Specification |
|---|--|----------------|-----------------|---|---|
|  <p>721™ PVC</p> <ul style="list-style-type: none"> Premium, high-strength formulation for irrigation, DWV, pool & spa and plumbing. Can be used without primer on non-pressure systems if local codes permit. | <ul style="list-style-type: none"> 6" (160 mm) PVC 4" (110 mm) Schedule 80 PVC | Fast | BLUE | UPC NSF PW-G/DWV/SW | ASTM D 2564 NSF/ANSI 14 NSF/ANSI 61 |
| AVAILABLE SIZES Gallon (#10160), Quart (#10161), Pint (#10162), ½ Pint (#10163), ¼ Pint (#10849) | | | | | |
|  <p>711™ PVC</p> <p><i>INDUSTRIAL GRADE</i></p> <ul style="list-style-type: none"> High-strength formula for large diameter pressure piping systems. Good gap filling properties. Medium set allows for more working time in warm weather. | <ul style="list-style-type: none"> 12" (315 mm) PVC all classes & schedules | Medium | GRAY | UPC NSF PW-G/DWV/SW SP | ASTM D 2564 NSF/ANSI 14 NSF/ANSI 61 CSA B137.3 CSA B181.2 |
| AVAILABLE SIZES Gallon (#14834), Quart (#14835), Pint (#14836), ½ Pint (#14837) | | | | | |
|  <p>717™ PVC</p> <ul style="list-style-type: none"> Quality formulation for plumbing, industrial, pool, irrigation and electrical piping systems. Good gap filling properties. Medium set allows for more working time in warm weather. | <ul style="list-style-type: none"> 12" (315 mm) PVC all classes & schedules | Medium | CLEAR GRAY | UPC NSF PW-G/DWV/SW NSF PW-G/DWV/SW (Gray Only) | ASTM D 2564 NSF/ANSI 14 NSF/ANSI 61 CSA B137.3 CSA B181.2 |
| AVAILABLE SIZES CLEAR: Gallon (#14825), Quart (#14826), Pint (#14827), ½ Pint (#14828), ¼ Pint (#14829) GRAY: Gallon (#14830), Quart (#14831), Pint (#14832), ½ Pint (#14833) | | | | | |
|  <p>719™ PVC</p> <p><i>INDUSTRIAL GRADE</i></p> <ul style="list-style-type: none"> Premium, high-strength formulation for large size industrial piping systems. Ideal for fabrication of large fittings and applications requiring high gap filling properties. Suitable for irrigation, conduit, other pressure and non-pressure applications. | <ul style="list-style-type: none"> 30" (800 mm) PVC all classes & schedules | Slow | WHITE GRAY | UPC NSF PW-G/DWV/SW NSF PW-G/DWV/SW (Gray Only) | ASTM D 2564 NSF/ANSI 14 NSF/ANSI 61 CSA B137.3 CSA B181.2 |
| AVAILABLE SIZES WHITE: Gallon (#10141), Quart (#10144), Pint (#10147), ½ Pint (#10150), ¼ Pint (#10861) GRAY: Gallon (#10142), Quart (#10145), Pint (#10148), ½ Pint (#10151) | | | | | |
|  <p>725™ WET 'R DRY™</p> <ul style="list-style-type: none"> Premium formula for wet conditions and/or quick pressurization. Suitable for irrigation, plumbing, and pool & spa applications. Can be used without primer on non-pressure systems if local codes permit. | <ul style="list-style-type: none"> 6" (160 mm) PVC 4" (110 mm) Schedule 80 PVC | Extremely Fast | AQUA BLUE | UPC NSF PW-G/DWV/SW | ASTM D 2564 NSF/ANSI 14 NSF/ANSI 61 |
| AVAILABLE SIZES Gallon (#10164), Quart (#10165), Pint (#10166), ½ Pint (#10167), ¼ Pint (#10850) | | | | | |
|  <p>727™ HOT 'R COLD™</p> <ul style="list-style-type: none"> Premium formula for all weather conditions (-15°F to 110°F / -26°C to 43°C). Excellent for industrial, irrigation, electrical conduit, pool & spa and plumbing, including PVC foam core pipe. Can be used without primer on non-pressure systems if local codes permit. | <ul style="list-style-type: none"> 6" (160 mm) PVC 4" (110 mm) Schedule 80 PVC | Very Fast | CLEAR | UPC NSF PW-G/DWV/SW | ASTM D 2564 NSF/ANSI 14 NSF/ANSI 61 |
| AVAILABLE SIZES Gallon (#10840), Quart (#10841), Pint (#10842) | | | | | |
|  <p>737™ TURF 'N AG™</p> <ul style="list-style-type: none"> This high quality blue cement has a slightly higher viscosity making it ideal for turf and agricultural applications and excellent for PVC well casing. Blue color fades to clear in sunlight for cleaner looking joints. Can be used without primer on non-pressure systems if local codes permit. | <ul style="list-style-type: none"> 8" (200 mm) PVC 4" (110 mm) Schedule 80 PVC | Very fast | BLUE to CLEAR | UPC NSF PW-G/DWV/SW | ASTM D 2564 NSF/ANSI 14 NSF/ANSI 61 |
| AVAILABLE SIZES Gallon (#10988), Quart (#10989), Pint (#10990), ½ Pint (#11984), ¼ Pint (#11985) | | | | | |

Heavy Bodied

Extra Heavy Bodied

Medium Bodied

PVC SPECIALTY SOLVENT CEMENTS

Medium Bodied



750ECO™ HOTWELD

- Maximum strength. Ultra low VOC. Reduced odorous fumes for improved workplace environment.
- Ideal for irrigation, DWV, pool and spa, plumbing and non-pressure applications.
- Can be used without primer on non-pressure systems if local codes permit.



- 6" (160 mm) PVC
- 4" (110 mm) Schedule 80 PVC

Fast



ASTM D 2564
NSF/ANSI 14
NSF/ANSI 61

AVAILABLE SIZES Gallon (#14820), Quart (#14821), Pint (#14822), ½ Pint (#14823), ¼ Pint (#14824)



750™ HOTWELD

- Medium bodied and extremely fast setting speed make this cement ideal for irrigation, DWV, pool and spa, plumbing and non-pressure applications.
- Works great in wet conditions.
- Extremely hot, fast set-up blue cement.
- Can be used without primer on non-pressure systems if local codes permit.

- 6" (160 mm) PVC
- 4" (110 mm) Schedule 80 PVC

Extremely Fast



ASTM D 2564
NSF/ANSI 14
NSF/ANSI 61

AVAILABLE SIZES Gallon (#13750), Quart (#13751), Pint (#13752), ½ Pint (#13753), ¼ Pint (#13754)



795™ PVC

- Premium cement specially formulated for use on flexible and/or rigid PVC.
- Forms flexible high-strength joints.

- 6" (160 mm) PVC
- 3" (90 mm) Schedule 80 PVC

Fast



ASTM D 2564
NSF/ANSI 14
NSF/ANSI 61

AVAILABLE SIZES CLEAR: Gallon (#10278), Quart (#10280), Pint (#10281), ½ Pint (#10282), ¼ Pint (#10283)
BLUE: Gallon (#11727), Quart (#11905)

CPVC SPECIALTY SOLVENT CEMENTS

Regular Bodied



713™ CPVC

- For potable water to 180°F (82°C).
- Suitable for residential plumbing and industrial systems.

- 2" (63 mm) CPVC copper tube size

Fast



ASTM D 2846
ASTM F 493
NSF/ANSI 14
NSF/ANSI 61

AVAILABLE SIZES Quart (#10126), Pint (#10127), ½ Pint (#10128), ¼ Pint (#10129)

Medium Bodied



FlowGuard Gold®

- ONE STEP CEMENT. Formulated to be used without primer if local codes permit.
- For potable water to 180°F (82°C).
- Suitable for residential plumbing and industrial systems.
- Approved by Lubrizol Advanced Materials, Inc. for use on FlowGuard Gold® Systems.

- 2" (63 mm) CPVC copper tube size

Fast



ASTM D 2846
ASTM F 493
NSF/ANSI 14
NSF/ANSI 61
CSA B137.6

AVAILABLE SIZES Gallon (#11025), Quart (#11026), Pint (#11027), ½ Pint (#11028), ¼ Pint (#11029)

Heavy Bodied



714™ CPVC

- Industrial quality for non-chemical applications up to 180°F (82°C).
- Approved for use on Corzan® CPVC piping systems.

- 12" (315 mm) CPVC, all classes & schedules

Medium



ASTM D 2846
ASTM F 493
NSF/ANSI 14
NSF/ANSI 61

AVAILABLE SIZES ORANGE: Gallon (#10130), Quart (#10132), Pint (#10135), ½ Pint (#10137)
GRAY: Quart (#10131), Pint (#10134)



724™ CPVC

INDUSTRIAL GRADE

- Premium, high-strength, chemical-resistant solvent cement for use with CPVC and PVC piping systems carrying acids, bases, salts, and hypochlorites.
- Approved for use on Corzan® CPVC piping systems.

- 12" (315 mm) CPVC and PVC, all classes & schedules

Medium



ASTM F 493
NSF/ANSI 14
NSF/ANSI 61

AVAILABLE SIZES ORANGE: Gallon (#12817), Quart (#12818)
GRAY: Gallon (#12233), Quart (#11659), Pint (#11890)

Extra Heavy Bodied



729™ CPVC

INDUSTRIAL GRADE

- Extra heavy body industrial quality cement for applications requiring high gap filling properties. Ideal for fabrication of large sized fittings.
- May be used for chemical applications.

- 24" (600 mm) CPVC, all classes & schedules


Slow




ASTM F 493

AVAILABLE SIZES Gallon (#10844), Quart (#10845)

ABS SOLVENT CEMENTS

| | Max Pipe Size (Interference Fit) | Set Time | Available Color | Industry Listing | Meets Following Performance Specification |
|---|----------------------------------|----------|-----------------|---|---|
|  771™ ABS ▪ For plumbing applications (DWW, sewer & drain pipe), conduit and foam core. | ▪ 8" (200 mm) ABS | Fast | MILKY YELLOW | UPC (Milky Only) NSF DWW/SW NSF US DWW/SW (Yellow Only) | ASTM D 2235 NSF/ANSI 14 CSA B181.1 |

AVAILABLE SIZES MILKY: Gallon (#10230), Quart (#10232), Pint (#10233)
 YELLOW: Gallon (#10965), Quart (#10966), Pint (#10967), ½ Pint (#10968), ¼ Pint (#10969) - Canada Only


| | | | | | |
|---|-------------------|------|-------|-------------------|----------------------------|
|  773™ ABS ▪ For plumbing applications (DWW, sewer & drain pipe), conduit and foam core. | ▪ 8" (200 mm) ABS | Fast | BLACK | UPC NSF DWW/SW | ASTM D 2235 NSF/ANSI 14 |
|---|-------------------|------|-------|-------------------|----------------------------|

AVAILABLE SIZES Gallon (#10241), Quart (#10243), Pint (#10244), ½ Pint (#10245), ¼ Pint (#10246)

TRANSITION & SPECIALTY SOLVENT CEMENTS

| | | | | | |
|--|--|------|-------------|---|---|
|  790™ MULTI-PURPOSE ▪ High-strength multi-purpose cement for PVC and CPVC pipe and fittings. | ▪ 6" (160 mm) ▪ 4" (110 mm) Schedule 80 | Fast | LIGHT AMBER | — | — |
|--|--|------|-------------|---|---|

AVAILABLE SIZES Gallon (#11248), Quart (#10257), Pint (#10258), ½ Pint (#10259), ¼ Pint (#10260)

| | | | | | |
|--|--|------|-------|-------------------|-------------|
|  794™ ABS - PVC ▪ For use only on ABS to PVC transition joints in non-pressure systems. ▪ Suitable for sewer, DWW and conduit. | ▪ 6" (160 mm) <u>Not</u> for Schedule 80 | Fast | GREEN | UPC NSF DWW/SW | ASTM D 3138 |
|--|--|------|-------|-------------------|-------------|


AVAILABLE SIZES Gallon (#10272), Quart (#10273), Pint (#10274), ½ Pint (#10275), ¼ Pint (#13369)

COMMITMENT TO PRODUCT EXCELLENCE IN EVERY CAN

Weld-On is committed to developing top quality products for joining plastic piping systems.

Each Weld-On can is a result of:

Comprehensive R&D analysis to determine the optimal formulations for production.



Rigorous testing and certification per ASTM standards Tests, including lap shear, hydrostatic burst, dissolution, resin content, viscosity, etc. are carried out by Weld-On and independent accreditation organizations such as CSA, NSF International and IAPMO.



Meticulous raw materials testing, sourcing and qualification conducted by Weld-On's R&D, procurement and quality control team.
















ISO 9001:2015 certified production and quality management process.

WELD-ON IS THE INDUSTRY LEADING, INNOVATIVE PLASTIC PIPE JOINING SOLUTIONS PROVIDER











Medium Bodied

Medium Bodied

PRIMERS & CLEANERS

| | | Available Color | Industry Listing | Meet Following Performance Specification |
|--|---|--|--|--|
|  | ECO PRIMER <ul style="list-style-type: none"> Ultra low VOC. Reduced odorous fumes for improved workplace environment. Quality primer essential for proper softening and preparation of PVC and CPVC pipe and fitting surfaces. |  CLEAR PURPLE |  NSF U.P. CODE (Purple only) | ASTM F 656 NSF/ANSI 14 NSF/ANSI 61 |
| AVAILABLE SIZES PURPLE: Gallon (#14843), Quart (#14844), Pint (#14845), ½ Pint (#14846), ¼ Pint (#14847) CLEAR: Gallon (#14838), Quart (#14839), Pint (#14840), ½ Pint (#14841), ¼ Pint (#14842) | | | | |
|  | P-68™ PRIMER <ul style="list-style-type: none"> Quality primer essential for proper softening and preparation of PVC and CPVC pipe and fitting surfaces. | CLEAR PURPLE |   (Purple only) PW-G/DW/SW | ASTM F 656 NSF/ANSI 14 NSF/ANSI 61 |
| AVAILABLE SIZES PURPLE: Gallon (#10208), Quart (#10210), Pint (#10212), ½ Pint (#10214), ¼ Pint (#10216) CLEAR: Gallon (#10207), Quart (#10209), Pint (#10211), ½ Pint (#10213), ¼ Pint (#10215) | | | | |
|  | P-70™ PRIMER <ul style="list-style-type: none"> Premium industrial strength primer essential for proper softening and preparation of PVC and CPVC pipe and fitting surfaces. Specially recommended for use on Schedule 80 (PN 10 and higher) and large size pipe. Excellent for cold weather applications. | INDUSTRIAL GRADE CLEAR PURPLE |   (Purple only) PW-G/DW/SW | ASTM F 656 NSF/ANSI 14 NSF/ANSI 61 |
| AVAILABLE SIZES PURPLE: Gallon (#10221), Quart (#10223), Pint (#10225), ½ Pint (#10227), ¼ Pint (#10229) CLEAR: Gallon (#10220), Quart (#10222), Pint (#10224), ½ Pint (#10226), ¼ Pint (#10228) | | | | |
|  | P-75™ PRIMER <ul style="list-style-type: none"> Premium, fast acting, industrial strength primer essential for proper softening and preparation of PVC and CPVC pipe and fitting surfaces. Specially formulated for wet and/or quick set applications. | AQUA BLUE |  PW-G/DW/SW | ASTM F 656 NSF/ANSI 14 NSF/ANSI 61 |
| AVAILABLE SIZES Gallon (#10247), Quart (#10248), Pint (#10249), ½ Pint (#10250) | | | | |
|  | PC-64™ PRIMER/CONDITIONER <ul style="list-style-type: none"> For surface preparation of PVC and CPVC pipe and fittings before bonding with solvent cements. | CLEAR PURPLE | - | - |
| AVAILABLE SIZES PURPLE: Gallon (#10871), Quart (#10872), Pint (#10873), ½ Pint (#10874), ¼ Pint (#10875) CLEAR: Quart (#12656) | | | | |
|  | C-65™ CLEANER <ul style="list-style-type: none"> For removal of oil and grease from the surfaces of PVC, CPVC, ABS and STYRENE pipe and fittings for bonding. Recommended for use before priming of pipe and fittings. | CLEAR | - | - |
| AVAILABLE SIZES Gallon (#10200), Quart (#10201), Pint (#10202), ½ Pint (#10203), ¼ Pint (#10204) | | | | |

PVC POOL & SPA SOLVENT CEMENTS

| | | Max Pipe Size (Interference Fit) | Set Time | Available Color | Industry Listing | Meets Following Performance Specification |
|--|--|---|----------|-----------------|--|---|
|  | 740ECO™ POOL REGULAR <ul style="list-style-type: none"> Maximum strength. Ultra low VOC. Reduced odorous fumes for improved workplace environment. Regular bodied cement for pool & spa applications. |  4" (110 mm) PVC | Fast | CLEAR |  PW-G/DW/SW U.P. CODE | ASTM D 2564 NSF/ANSI 14 NSF/ANSI 61 |
| AVAILABLE SIZES Gallon (#14848), Quart (#14849), Pint (#14850), ½ Pint (#14851) | | | | | | |
|  | 740™ POOL REGULAR <ul style="list-style-type: none"> Regular bodied cement for pool & spa applications. | 4" (110 mm) PVC | Fast | CLEAR |   PW-G/DW/SW | ASTM D 2564 NSF/ANSI 14 NSF/ANSI 61 |
| AVAILABLE SIZES Gallon (#13550), Quart (#13551), Pint (#13552), ½ Pint (#13553) | | | | | | |
|  | 744ECO™ POOL MEDIUM <ul style="list-style-type: none"> Maximum strength. Ultra low VOC. Reduced odorous fumes for improved workplace environment. Medium bodied cement for pool & spa applications. Can be used without primer on non-pressure systems if local codes permit. |  6" (160 mm) PVC 4" (110 mm) Schedule 80 PVC | Fast | CLEAR GRAY |  PW-G/DW/SW U.P. CODE  C US PW-G/DW/SW (Gray Only) | ASTM D 2564 NSF/ANSI 14 NSF/ANSI 61 CSA B137.3 CSA B181.2 |
| AVAILABLE SIZES CLEAR: Gallon (#14853), Quart (#14854), Pint (#14855), ½ Pint (#14856) GRAY: Gallon (#14858), Quart (#14859), Pint (#14860), ½ Pint (#14861) | | | | | | |

PVC POOL & SPA SOLVENT CEMENTS

| PVC POOL & SPA SOLVENT CEMENTS | | Max Pipe Size (Interference Fit) | Set Time | Available Color | Industry Listing | Meets Following Performance Specification |
|--|--|-------------------------------------|---|--|---|---|
|  <p>744™ POOL MEDIUM</p> <ul style="list-style-type: none"> Medium bodied cement for pool & spa applications. Can be used without primer on non-pressure systems if local codes permit. | <ul style="list-style-type: none"> 6" (160 mm) PVC 4" (110 mm) Schedule 80 PVC | Fast | <div style="border: 1px solid black; padding: 2px; display: inline-block;">CLEAR</div> <div style="border: 1px solid black; padding: 2px; display: inline-block;">GRAY</div> |   <small>PW-G/DWW/SW</small>  <small>C US PW-G/DWW/SW (Gray Only)</small> | ASTM D 2564 NSF/ANSI 14 NSF/ANSI 61 CSA B137.3 CSA B181.2 | |
| | AVAILABLE SIZES CLEAR: Gallon (#13554), Quart (#13555), Pint (#13556), ½ Pint (#13557) GRAY: Gallon (#13558), Quart (#13559), Pint (#13560), ½ Pint (#13561) | | | | | |
|  <p>746ECO™ POOL HEAVY</p> <ul style="list-style-type: none"> Maximum strength. Ultra low VOC. Reduced odorous fumes for improved workplace environment. Heavy bodied cement for pool & spa applications. | <ul style="list-style-type: none"> 12" (315 mm) PVC all classes & schedules | Medium | <div style="border: 1px solid black; padding: 2px; display: inline-block;">CLEAR</div> <div style="border: 1px solid black; padding: 2px; display: inline-block;">GRAY</div> |  <small>PW-G/DWW/SW U.P. CODE</small>  <small>C US PW-G/DWW/SW (Gray Only)</small> | ASTM D 2564 CSA B137.3 CSA B181.2 NSF/ANSI 14 NSF/ANSI 61 | |
| | AVAILABLE SIZES CLEAR: Gallon (#14862), Quart (#14863), Pint (#14864), ½ Pint (#14865) GRAY: Gallon (#14866), Quart (#14867), Pint (#14868), ½ Pint (#14869) | | | | | |
|  <p>746™ POOL HEAVY</p> <ul style="list-style-type: none"> Heavy bodied cement for pool & spa applications. | <ul style="list-style-type: none"> 12" (315 mm) PVC all classes & schedules | Medium | <div style="border: 1px solid black; padding: 2px; display: inline-block;">CLEAR</div> <div style="border: 1px solid black; padding: 2px; display: inline-block;">GRAY</div> |   <small>PW-G/DWW/SW</small>  <small>C US PW-G/DWW/SW (Gray Only)</small> | ASTM D 2564 CSA B137.3 CSA B181.2 NSF/ANSI 14 NSF/ANSI 61 | |
| | AVAILABLE SIZES CLEAR: Gallon (#13562), Quart (#13563), Pint (#13564), ½ Pint (#13565) GRAY: Gallon (#13566), Quart (#13567), Pint (#13568), ½ Pint (#13569) | | | | | |
|  <p>747™ POOL 'R SPA™</p> <ul style="list-style-type: none"> Medium bodied premium PVC cement specially formulated for pool & spa applications. Ideal for wet or quick pressurization conditions. Blue cement fades to clear in sunlight for cleaner looking joints. Can be used without primer on non-pressure systems if local codes permit. | <ul style="list-style-type: none"> 6" (160 mm) PVC 4" (110 mm) Schedule 80 PVC | Extremely Fast | <div style="border: 1px solid black; padding: 2px; display: inline-block;">BLUE to CLEAR</div> |   <small>PW-G/DWW/SW</small>  | ASTM D 2564 NSF/ANSI 14 NSF/ANSI 61 CSA B45.10 | |
| | AVAILABLE SIZES Gallon (#10851), Quart (#10852), Pint (#10853), ½ Pint (#10854), ¼ Pint (#10855) | | | | | |
|  <p>748ECO™ POOL FAST</p> <ul style="list-style-type: none"> Maximum strength. Ultra low VOC. Reduced odorous fumes for improved workplace environment. Specially formulated for pool maintenance and repair. For wet or quick pressurization conditions. Blue cement fades to clear in sunlight for cleaner looking joints. Can be used without primer on non-pressure systems if local codes permit. | <ul style="list-style-type: none"> 6" (160 mm) PVC 4" (110 mm) Schedule 80 PVC | Fast | <div style="border: 1px solid black; padding: 2px; display: inline-block;">BLUE to CLEAR</div> |  <small>PW-G/DWW/SW U.P. CODE</small> | ASTM D 2564 NSF/ANSI 14 NSF/ANSI 61 | |
| | AVAILABLE SIZES Gallon (#14870), Quart (#14871), Pint (#14872), ½ Pint (#14873) | | | | | |
|  <p>748™ POOL FAST™</p> <ul style="list-style-type: none"> Medium bodied high-strength and ultra fast setting cement; specially formulated for pool maintenance and repair. For wet or quick pressurization conditions. Blue cement fades to clear in sunlight for cleaner looking joints. Can be used without primer on non-pressure systems if local codes permit. | <ul style="list-style-type: none"> 6" (160 mm) PVC 4" (110 mm) Schedule 80 PVC | Ultra Fast | <div style="border: 1px solid black; padding: 2px; display: inline-block;">BLUE to CLEAR</div> |   <small>PW-G/DWW/SW</small> | ASTM D 2564 NSF/ANSI 14 NSF/ANSI 61 | |
| | AVAILABLE SIZES Gallon (#13655), Quart (#13342), Pint (#13343), ½ Pint (#13344) | | | | | |
|  <p>ECO POOL PRIMER™</p> <ul style="list-style-type: none"> Ultra low VOC. Reduced odorous fumes for improved workplace environment. Quality primer essential for proper softening and preparation of PVC and CPVC pipe and fitting surfaces | | | <div style="border: 1px solid black; padding: 2px; display: inline-block;">PURPLE</div> <div style="border: 1px solid black; padding: 2px; display: inline-block;">CLEAR</div> |  <small>U.P. CODE (Purple Only)</small>  <small>PW-G/DWW/SW</small> | ASTM F 656 NSF/ANSI 14 NSF/ANSI 61 | |
| | AVAILABLE SIZES PURPLE: Gallon (#14880), Quart (#14881), Pint (#14882), ½ Pint (#14883), ¼ Pint (#14884) CLEAR: Gallon (#14875), Quart (#14876), Pint (#14877), ½ Pint (#14878), ¼ Pint (#14879) | | | | | |

WELD-ON SOLVENT CEMENTS AND PRIMERS

Applicators



SuperSwab™

A sturdy easy-to-grip 4" swab for pipe diameter from 4" through 8". Adjustable length and dual cap design that fits quart and gallon containers. The swab tip is disposable and swab handle is reusable.

Patent No. 8747004

Individual Pack (#14108), **Bulk Pack** (#14111),
Replacement Swab Tip (#14109),
Replacement Swab Tip Bulk Pack (#14112)



7020

Jumbo Roll-A-Weld 7" roller for pipe diameters of 6" or larger; fits MT-648 gallon can and cements available in wide mouth cans. (#10008)



4020

4" swab for pipe diameters of 6" or larger; fits MT-648 empty gallon can and cements available in wide mouth cans. (#10009)



3020

Roll-A-Weld 3" roller for pipe diameters from 3" through 6"; fits MT-653 empty quart triple tight neck can. (#10007)



5020

4" swab for pipe diameters from 3" through 8"; fits standard quart can as well as MT-651 empty quart can. (#12071)



6020

Roll-A-Weld 4" roller for pipe diameters from 3" through 8"; fits standard quart can as well as MT-651 empty quart can. (#11957)



8020

4" cotton swab with wire handle for use on pipe diameter 6" or larger. (#13360)



SuperDauber™

Fully adjustable, telescopic stem that fits quart, pint and ½ pint cans. Easy grip, ribbed handle allows better dauber control. Shed-resistant dauber material is better for smooth, full application of cement or primer. Available in ¾" (#10832) and 1¼" (#10833) dauber sizes.



Cap Daubers

DH Daubers fit ¼ pint & ½ pint cans; DP daubers fit ½ pint & pint cans; DQ daubers fit quart cans. Available in ⅜", ½", ¾", and 1½" dauber sizes.

AVAILABLE SIZES

DH-38 (#13199) **DP-50** (#10003) **DP-75** (#10004)
DP-150 (#10005) **DQ-50** (#11831) **DQ-75** (#12429)
DQ-150 (#10006)



PB-1

Plastic handle brush. Fits standard pint and quart cans. (#12121)

Accessories



CST-36 Cable Saw

36" cable saw with T-Handle for cutting plastic pipe through 8" diameters. (#12739)



Easy Twist™

The Easy Twist™ is ergonomically designed to easily open the can in a simple twist without damaging the cap. When closing the can, the Easy Twist™ helps tighten and seal the cap with extra torque preventing solvent cements or primers from drying out. (#14550 8-pack)



Can-Tote Cement & Primer Carrier

For carrying quart and pint cans.
6 pack (#14147)
24 pack (#12891)



Empty Metal Cans

(Caps not available for sale. Daubers sold separately.)

AVAILABLE SIZES

MT-648 Gallon can with 2⅞" neck (#10010)
MT-651 Quart can with 1¾" neck (#10012)
MT-653 Quart can with triple tight neck (paint style) (#10014)
MT-654 Pint can with 1¾" neck (#10015)



Professional Hand Cleaner Wipes

Advanced hand cleaner disposable wipes for removing residual solvent cements (PVC, CPVC, ABS), primers & sealants. Also removes dirt, oil, grease and much more. (#12762)



DEB-2 Deburring Tool

For PVC, CPVC, ABS, PE & PB pipe from ½" through 2" IPS. (#12079)



Mounted Power Beveling Tool

For beveling the ends of small diameter plastic pipe (PVC, CPVC, ABS). Nominal pipe sizes ½" CTS - 3" IPS. (#12863)



Pipe and Fitting Pullers

For installation of large diameter plastic pipe and fittings (PVC, CPVC, ABS). Available for pipe and fittings sizes 4" - 12" diameter (#12816) and 14" - 20" diameter (#12815). Lightweight, durable and can easily be operated by one person.




SPECIALTY PRODUCTS

Weld-On® offers extensive specialty products to meet your plumbing needs.

- **Repair and fabrication adhesives** are great for repairing cracks, leaky pipe valves and fittings. These adhesives are also great for pipe fabrication because of their excellent gap-filling properties.
 - **Weld-On® pipe thread sealant** product line is the best in the industry, sealing and lubricating metal and plastic pipe threads. These sealants work well on pipelines conveying various materials from compressed gas to corrosive liquids.
 - **Joint compounds** set and seal plumbing fixtures, drains, as well as pipe threads.
 - **Joint lubricants** are excellent for lubricating valves and gasketed joints.
 - **Cutting oils** are used for cutting and threading ferrous and non-ferrous metal pipes.
- Please refer to the individual product description for additional details.

REPAIR AND FABRICATION ADHESIVES

The following Weld-On adhesives have Low VOC emissions per SCAQMD Rule 1168. Use of these products can qualify for one credit in the LEED® Green Building Rating System – Indoor Environmental Quality.













| | Applicable for use with | Viscosity | Set Time | Color | Shelf Life |
|--|---|-------------|----------|-------|------------|
|  <p>810™</p> <ul style="list-style-type: none"> ▪ Thick syrupy, two-component, high strength reactive adhesive. ▪ Product can withstand very high pressures and is high impact resistant. Great for repairing cracks or leaky pipe valves and fittings. ▪ Excellent gap-filling properties. Ideal for fabricating fittings and joining saddles to pipe. Good for bonding large diameter PVC and CPVC pipe and fittings. | <ul style="list-style-type: none"> ▪ PVC ▪ ABS ▪ Acrylic ▪ Clay ▪ Concrete ▪ CPVC ▪ Styrene ▪ FRP (fiberglass-reinforced polyester) | 40,000 cps | 1 hour | WHITE | 1 year |
| <p>AVAILABLE SIZES Gallon (#10810), Quart (#10811), Pint (#10812), 4 Oz (#10813)</p> | | | | | |
|  <p>811™</p> <ul style="list-style-type: none"> ▪ Thick syrupy, two-component, high strength reactive adhesive. Same formula as 810, but different packaging format. ▪ Product can withstand very high pressures and is high impact resistant. Great for repairing cracks or leaky pipe valves and fittings. ▪ Excellent gap-filling properties. Ideal for fabricating fittings and joining saddles to pipe. Good for bonding large diameter PVC and CPVC pipe and fittings. ▪ Conveniently packaged in a dual cylinder cartridge for easy dispensing and application to the bonding surfaces. ▪ See below for accessories. | <ul style="list-style-type: none"> ▪ PVC ▪ ABS ▪ Acrylic ▪ Clay ▪ Concrete ▪ CPVC ▪ Styrene ▪ FRP (fiberglass-reinforced polyester) | 40,000 cps | 1 hour | WHITE | 1 year |
| <p>AVAILABLE SIZES 470mL (#10985)</p> | | | | | |
|  <p>845™</p> <ul style="list-style-type: none"> ▪ Highly viscous, two-component, high strength, reactive adhesive. ▪ Product can withstand very high pressure and large temperature range (-30°F / -35°C to 200°F / 93°C). It is also impact resistant and can be used in wet conditions. ▪ Excellent gap-filling properties. Ideal for fabricating fittings and joining saddles to pipe. Good for bonding large diameter PVC and CPVC pipe and fittings. ▪ Conveniently packaged in a dual cylinder cartridge for easy dispensing and application to the bonding surfaces. ▪ See below for accessories. | <ul style="list-style-type: none"> ▪ PVC ▪ ABS ▪ Acrylic ▪ Concrete ▪ CPVC ▪ Fiberglass ▪ FRP (fiberglass-reinforced polyester) | 400,000 cps | 30 mins. | TAN | 1 year |
| <p>AVAILABLE SIZES 400mL (#12759), 43mL (#12709 - 12-pack), 43mL Starter Kit (#12711)</p> | | | | | |

ADHESIVE ACCESSORIES

| | |
|---|---|
|  <p>811 Dispensing gun and mixing tips</p> <ul style="list-style-type: none"> ▪ Manual or pneumatic dispensing gun for convenient application of Weld-On 811 dual cartridge, high strength adhesive. ▪ Straight mixing tip provides even blending of the two adhesive components prior to application. |  <p>845 Dispensing gun and mixing tips</p> <ul style="list-style-type: none"> ▪ Manual or pneumatic dispensing gun for convenient application of Weld-On 845 dual cartridge, high strength adhesive. ▪ Straight mixing tip provides even blending of the two adhesive components prior to application. |
| <p>AVAILABLE SIZES Manual gun (#14150) Mixing tip (#14080)</p> | <p>AVAILABLE SIZES 400mL: Metal frame manual gun (#14152) Mixing tip (#14040) 43mL: Manual gun (#12471), mixing tip (#14077)</p> |

PIPE THREAD SEALANTS

All Weld-On® pipe thread sealants are lead free, odor free, non-staining, applicable in a large temperature range, can be immediately pressurized, easy to clean and have a creamy texture that packs well between pipe threads for a better seal.

| | Industry Listing | Pressure Rating (PSI) | | Temperature Range | Color | Shelf-life |
|--|---|--|----------------|-------------------|--------------|------------|
| | | Liquids | Gases | | | |
|  <p>All Seal™ MULTI-PURPOSE SEALANT</p> <ul style="list-style-type: none"> Slow drying, soft-setting formula allows ample time to work with pipe joints. Also easy for disassembly. Creamy, non-separating consistency provides excellent thread coverage. Product is grit-free to provide leak-proof seal on pipe threads. For sealing and lubricating all metal and plastic (ABS, PVC, CPVC, Polypropylene, & Nylon) piping systems carrying various materials.¹ Very low VOC content: 152 g/L. |   | 6,000 | 3,000 | -50°F to 455°F | BEIGE | 2 years |
| AVAILABLE SIZES Pint (#87670), 1/2 Pint (#87665), 1/4 Pint (#87660) | | | | | | |
|  <p>Blue Seal™ INDUSTRIAL GRADE SEALANT</p> <ul style="list-style-type: none"> Heavy duty, grit-free formula. Excellent for industrial applications and pipe lines in high vibration environments. Contains finely homogenized PTFE particles for filling cracks and thread imperfections – ensuring a leak-proof seal. For sealing and lubricating all metal and plastic (ABS, PVC, CPVC, Polypropylene, & Nylon) piping systems carrying various materials.¹ Tested and approved for addition to the FBC System compatible program for use with FlowGuard Gold®, BlazeMaster®, and Corzan® CPVC plastic piping systems. No VOC content. |    | 10,000 | 3,000 | -50°F to 455°F | BLUE | 3 years |
| AVAILABLE SIZES Quart (#87695), Pint (#87690), 1/2 Pint (#87685) | | | | | | |
|  <p>White Seal™ Plus MULTI-PURPOSE SEALANT WITH PTFE</p> <ul style="list-style-type: none"> Contains finely homogenized PTFE particles for filling cracks and thread imperfections – ensuring a leak-proof seal. Non-setting formula allows easy disassembly of joints without damage to pipe, fittings or threads. Protects threaded areas from rust and corrosion and prevents galling. For sealing and lubricating all metal and plastic (ABS, PVC, CPVC, Polypropylene, & Nylon) piping systems carrying various materials.¹ Tested and approved for addition to the FBC System compatible program for use with FlowGuard Gold®, BlazeMaster®, and Corzan® CPVC plastic piping systems. No VOC content. |    | 10,000 | 3,000 | -50°F to 455°F | WHITE | 3 years |
| AVAILABLE SIZES Quart (#87740), Pint (#87735), 1/2 Pint (#87730), 1/4 Pint (#87725) | | | | | | |
|  <p>505 Key Tite™ METAL PIPE SEALANT</p> <ul style="list-style-type: none"> Special formulation seals and lubricates metal pipe joints as well as protects them from rusting and seizing. Applicable for all types of metal joints (threaded, flanged or gasketed). For sealing and lubricating all metal piping systems carrying various materials.² | — | Dependent on pressure rating of the piping systems | -50°F to 450°F | GREEN | 2 years | |
| AVAILABLE SIZES Gallon (#10062), Quart (#10063), Pint (#10064), 1/2 Pint (#10068), 1/4 Pint (#10069) | | | | | | |

¹ All Seal, Blue Seal, and White Seal can be used on **metal and plastic** piping systems carrying: air & gases (compressed, manufactured or natural), ammonia, brine, acid (diluted), caustic alkalis (diluted), corrosives, freons, fuel (diesel, gasoline, jet fuel, and kerosene), oils, petroleum, propane, solvents, steam, sugar, and water. Not recommended for oxygen, fluorine, or liquid sodium systems.

² 505 Key Tite can be used on **metal** piping systems carrying: acids (diluted), air (compressed or gaseous), alcohols, alkalis (diluted), brine, caustics (diluted), gases (manufactured or natural), low pressure steam lines, sugar (liquid), and hot or cold water.

JOINT COMPOUNDS

In addition to our premium Weld-On® sealants, we also offer a cost-effective sealant alternative - our joint compounds. They are semi-solid, lead-free, non-toxic, and also provide effective seals to plumbing fixtures & drains, as well as pipe threads.



Soft Seal Plumber Putty

- For setting and sealing plumbing fixtures and drains. Will not harden, crack or crumble.
- Complies with Federal Specification TT-P-1536A.
- Lead-free, non-corrosive and stainless.
- 100% water-proof.

AVAILABLE SIZES 5 LB. (#80105), 3 LB. (#80103), 14 Oz. (#80100)



Epoxy Putty Stick

- Quick hardening sealant/adhesive.
- Plugs, seals, patches or repairs most materials.
- Excellent for underwater repairs.
- Hardens in 20 minutes and cures in 1 hour.
- Non-toxic, safe for potable water line.

AVAILABLE SIZES 4 Oz (#84055)



Pipe Stick Joint Compound

- Thread sealant for metal and plastic pipe.
- Prevents rust and corrosion allowing easier disassembly.
- Lead-free and non-toxic.

AVAILABLE SIZES 1.3 Oz (#81255)



Thread Seal Tape

- Contains PTFE.
- Complies with MIL-T-27730A specifications.
- Available in various colors, widths and lengths.

AVAILABLE SIZES: 1/2" x 260" White (#80315), 1/2" x 520" White (#80310), 3/4" x 260" White (#87750), 3/4" x 520" White (#87755), 1" x 520" White (#87720), 1/2" x 260" Yellow Gas Line (#80320), 1/2" x 260" Pink Extra Duty (#80325)

JOINT LUBRICANTS

Weld-On joint lubricants are non-toxic, non-corrosive and can be easily washed out of piping systems.



EZ Flush Pipe Lubricant

- Applicable for joining all metal and plastic gasketed pipes.
- Lubricates slip-on or "O" ring type joints without harming rubber or plastic gaskets.
- Easily flushes out of piping system.
- Non-toxic and non-corrosive. No taste or odor.



AVAILABLE SIZES 5 Gallon (#87721), Gallon (#87719), Quart (#87718)



Seal Lube Gasket Lubricant

- Primes and lubricates slip-on or "O" ring type joints with rubber or synthetic rubber gaskets.
- Non-toxic and non-corrosive. No taste or odor.
- 100% water soluble.



AVAILABLE SIZES Gallon (#87715), Quart (#87710), Pint (#87705)



Slik Seal Plumber Grease

- For lubricating valve stems.
- 100% water-proof.

AVAILABLE SIZES 1 Oz. (#80427)

CUTTING OILS

Weld-On offers two types of cutting oil for use on metal pipe threading, cutting and other machines.



Light Cutting Oil

- For light duty manual or low rpm threading machines as well as for drilling, reaming and rolling machines using ferrous and non-ferrous metals.

AVAILABLE SIZES Gallon (#80425), Quart (#80424)



Dark Cutting Oil

- High-grade oil blend.
- For medium to heavy duty cutting, threading, drilling, reaming and rolling machines using ferrous and non-ferrous metals.

AVAILABLE SIZES 5 Gallon (#80422), Gallon (#80421), Quart (#80420), Pint (#80415)

SOLVENT CEMENTS SET/CURE TIMES AND APPLICATOR GUIDE

Average Initial Set Schedule For WELD-ON® PVC/CPVC Solvent Cements**

| Temperature Range | Pipe Sizes | | | | |
|--------------------|--------------------------|--------------------------|---------------------------|-----------------------------|----------------|
| | ½" to 1¼" (20mm to 40mm) | 1½" to 2" (50mm to 63mm) | 2½" to 8" (75mm to 200mm) | 10" to 15" (250mm to 380mm) | 15"+ (380mm +) |
| 60°-100°F/16°-38°C | 2 minutes | 5 minutes | 30 minutes | 2 hours | 4 hours |
| 40°-60°F/5°-16°C | 5 minutes | 10 minutes | 2 hours | 8 hours | 16 hours |
| 0°-40°F/-18°-5°C | 10 minutes | 15 minutes | 12 hours | 24 hours | 48 hours |

Note - Initial set schedule is the necessary time to allow before the joint can be carefully handled. In damp or humid weather allow 50% more set time.

Average Joint Cure Schedule For WELD-ON PVC/CPVC Solvent Cements**

| Relative Humidity 60% or less | Pipe Sizes | | | | | | | |
|--|--------------------------|-------------------------------|--------------------------|-------------------------------|---------------------------|-------------------------------|-----------------------------|-----------------------|
| | ½" to 1¼" (20mm to 40mm) | | 1½" to 2" (50mm to 63mm) | | 2½" to 8" (75mm to 200mm) | | 10" to 15" (250mm to 380mm) | 15"+ (380mm +) |
| Temperature range during assembly and cure periods | up to 160 psi / 11 Bar | 160 to 370 psi / 11 to 26 Bar | up to 160 psi / 11 Bar | 160 to 315 psi / 11 to 22 Bar | up to 160 psi / 11 Bar | 160 to 315 psi / 11 to 22 Bar | up to 100 psi / 7 Bar | up to 100 psi / 7 Bar |
| 60°-100°F/16°-38°C | 15 min | 6 hrs | 30 min | 12 hrs | 1½ hrs | 24 hrs | 48 hrs | 72 hrs |
| 40°-60°F/5°-16°C | 20 min | 12 hrs | 45 min | 24 hrs | 4 hrs | 48 hrs | 96 hrs | 6 days |
| 0°-40°F/-18°-5°C | 30 min | 48 hrs | 1 hour | 96 hrs | 72 hrs | 8 days | 8 days | 14 days |

Note - Joint cure schedule is the necessary time to allow before pressurizing system. In damp or humid weather allow 50% more cure time.

** These figures are estimates based on testing done under laboratory conditions. Field working conditions can vary significantly. This chart should be used as a general reference only.

Average Number of Joints/Quart (1Kg) of WELD-ON Cement*

| Pipe Diameters | ½"/ 20mm | ¾"/ 25mm | 1"/ 32mm | 1½"/ 50mm | 2"/ 63mm | 3"/ 90mm | 4"/ 110mm | 6"/ 160mm | 8"/ 200mm | 10"/ 250mm | 12"/ 315mm | 15"/ 380mm | 18"/ 450mm |
|------------------|-------------|-------------|-------------|--------------|-------------|-------------|--------------|--------------|--------------|---------------|---------------|---------------|---------------|
| Number of Joints | 300 | 200 | 125 | 90 | 60 | 40 | 30 | 10 | 5 | 2-3 | 1-2 | ¾ | ½ |

Note - For Primer: Double the number of joints shown for cement.

*These figures are estimates based on our laboratory tests. Due to the many variables in the field, these figures should be used as a general guide only. **Note: 1 Joint = 1 Socket**

Pipe Size Equivalent Chart - Inches/Millimeters

| | | | | | | | | | | | | | | | | | |
|-----|----|----|----|-----|-----|----|-----|----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| in. | ½" | ¾" | 1" | 1¼" | 1½" | 2" | 2½" | 3" | 4" | 6" | 8" | 10" | 12" | 14" | 18" | 24" | 30" |
| mm. | 20 | 25 | 32 | 40 | 50 | 63 | 75 | 90 | 110 | 160 | 200 | 250 | 315 | 355 | 450 | 600 | 800 |

WELD-ON APPLICATOR SELECTION GUIDE

Weld-On solvent cements are packaged with can-lid daubers: ¾" dauber on quarter pint and half pint cans and 1½" dauber on pint and quart cans. For proper solvent welding of pipe and fittings, the cement applicator **must** be no less than half the size of the pipe. See the following charts for applicator (daubers, swabs, and rollers) recommendations pertaining to pipe size.

| DAUBERS | Pipe Diameters | | | | | | | |
|------------|----------------|----|----|----|-----|-----|----|--|
| | ¼" | ½" | ¾" | 1" | 1¼" | 1½" | 2" | |
| ¾" Dauber | • | • | • | | | | | |
| ½" Dauber | | | • | • | | | | |
| ¾" Dauber | | | | | • | • | | |
| 1½" Dauber | | | | | | | • | |

| ROLLERS & SWABS | SIZE | FOR PIPE DIAMETERS |
|-----------------|-----------|--------------------|
| 3020 | 3" Roller | 3" - 6" |
| 6020 | 4" Roller | 3" - 8" |
| 7020 | 7" Roller | 6"+ |
| 4020 | 4" Swab | 6"+ |
| 5020 | 4" Swab | 3" - 8" |
| 8020 | 4" Swab | 6"+ |
| SuperSwab™ | 4" Swab | 4" - 8" |

PRODUCT SHELF LIFE

| Weld-On Products | Shelf-life | Weld-On Products | Shelf-life |
|--------------------|------------|---------------------|-------------|
| Primers / Cleaners | 3 years | CPVC Solvent Cement | 2-3.5 years |
| PVC Solvent Cement | 3-4 years | ABS Solvent Cement | 3 years |

*Refer to individual product for shelf-life detail.


TECHNICAL TRAINING

Proper solvent welding of plastic pipe and fittings is the key to a long, trouble-free service life for your piping system. The cost of solvent cement and primer is less than 1% of the entire cost of a plastic piping system project. However, if this 1% is not correctly implemented and there is a pipe joint failure, the remaining 99% will not work.

Common causes of joint failure are:

- *Insufficient or over application of solvent cement*
- *Inadequate insertion of the pipe into fitting*
- *Lack of knowledge about proper solvent welding techniques*

Weld-On offers a manned, not pre-recorded, technical hotline to help answer questions about Weld-On products and techniques for solvent welding plastic pipe and fittings. We also offer a comprehensive technical training program covering the best practices of solvent welding technique based on ASTM D2855 standard as well as field practice – for FREE. Call our technical team to learn more and sign up at 1-877-477-8327.

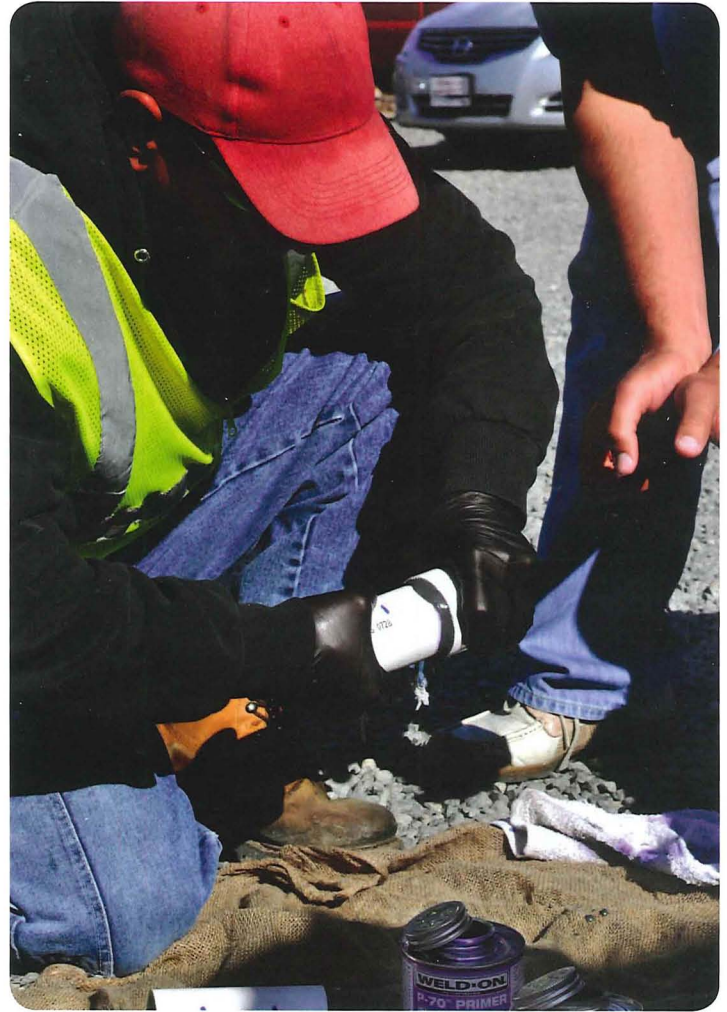

circa 1960's



OUR COMPANY

Established in 1954, IPS® Corporation has consistently grown over the past 60+ years. Today, we are the trusted leader in manufacturing solvent cements, adhesives, and components for the plumbing, construction and plastic fabrication industries. Our core brands include **WELD-ON®**, **WATER-TITE**, **TEST-TITE®**, **AB&A™**, **GUY GRAY™**, **METACRYLICS®**, **ROOT TOP BLOX®**, **STUDOR®** and **TRUEBRO®**. Our quality products are manufactured with proven formulation and design using state-of-the-art equipment and manufacturing techniques.

Headquartered in California, Weld-On, a division of IPS Corp., has operations throughout the United States, as well as China, and a worldwide network of sales representatives and distributors.

OUR COMMITMENT

Weld-On is committed to our customers in all aspects of our operation and in all functions of our company:

Quality products – We are committed to manufacturing quality products for professionals. In fact, our California facility is ISO 9001:2015 certified for its excellent quality management system. Our products are manufactured to the highest standards available and face stringent quality control tests prior to sale and distribution.

Excellent customer service – Our skilled team is readily available to help customers with product selection and ordering. We are experts in international shipping and our international customer service staff is certified in hazardous material shipment.

Professional technical service – Our technical specialists provide professional recommendations and product application/job-site installation training to suit the needs of our customers.

Expert R&D – Our research scientists and engineers have vast technical knowledge to develop the most technically advanced and innovative products to meet our customers' needs.




Our California facility takes pride in limiting volatile organic compound (VOC) emissions into the environment. Two regenerative thermo oxidizers are utilized to eliminate 99% of the VOC from our ventilation system before emitting air to the atmosphere.



Our laboratory is equipped with state-of-the-art equipment to ensure that our formulations and product performance meet the most stringent testing standards.

WELD-ON® SOLVENT CEMENTS, PRIMERS, AND CLEANERS

Weld-On is the original innovator of solvent cements, primers and cleaners for PVC, CPVC, and ABS plastic piping systems. Our Weld-On® name is globally-recognized as **the premium brand** of products for joining plastic pipes and fittings. We are committed not only to providing the best product performance, but to do so in the **most environmentally-responsible** manner. All Weld-On solvent cements, primers and cleaners **meet the requirements for Low VOC (volatile organic compound) emission limits** established by the California South Coast Air Quality Management District (SCAQMD), one of the nation's strictest air quality regulatory bodies and our new ultra low VOC ECO™ product line meets the more stringent SCAQMD 2023 regulations. Low VOC emissions contribute to cleaner air.

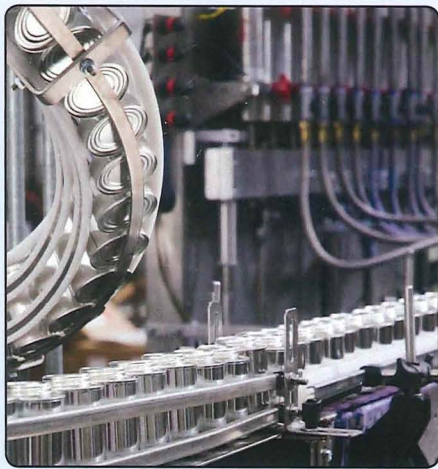

Advanced automated filling and packaging lines of Weld-On products ensure fast, efficient and accurate completion of product orders.



Current SCAQMD Rule 1168 Max VOC Content (gram/liter)*

| | |
|---------------------|-----|
| Primer | 550 |
| PVC Solvent Cement | 510 |
| CPVC Solvent Cement | 490 |
| ABS Solvent Cement | 325 |

All Weld-On products provide the following benefits:

- **High Quality Performance** with excellent installation properties.
- **User Friendly.** Reduced fumes and odor for the comfort and well-being of pipe installers.
- **NSF, UPC, and/or CSA Listed.** Products are qualified for use in applications such as potable water, turf, irrigation, pool, industrial, conduit, DWV and/or sewer.†
- **Meet ASTM Standards** for solvent cements and primers used for plastic pipe installation.‡
- **Environmentally Responsible.**

Weld-On solvent cements meet the stringent VOC content requirement per SCAQMD 1168. Credit can be earned per LEED® (Leadership in Energy and Environmental Design), IEQ Credit 4.1#.‡

†Refer to individual solvent cement and/or primer for specific ASTM Standards, NSF, UPC and/or CSA Listings.

‡LEED Indoor Environmental Air Quality 4.1: low-emitting materials – adhesives & sealant.

*Max VOC content will become more stringent when SCAQMD revises Rule 1168 in 2023.